

Scissor Lift

UpRight
POWERED ACCESS



- Working height up to 11.8m
- Manoeuvres easily with tight inside turning radius
- Electronic motor controller for smooth, quiet operation
- Fully proportional one-hand controls
- Steel deck with slip-resistant surface
- Platform material loading system
- Non-marking tyres

X26
X32


UpRight

X26/X32 scissor lift specifications

	X26N*	X26	X32
max. working height A	10.0m	10.0m	11.8m
max. platform height B	7.93m	7.93m	9.75m
max. drive height	7.93m	7.93m	9.75m
platform capacity (SWL)	340kg	454kg	340kg
platform size	0.71m x 3.2m	1.17m x 3.2m	1.17m x 3.2m
- inside with deck extended			
width C	0.83m	1.22m	1.22m
stowed height D	2.12m	2.12m	2.25m
- with guardrails lowered	1.99m	1.99m	1.88m
stowed length E	2.35m	2.35m	2.35m
gross weight	2,358kg	2,153kg	2,486kg
drive speed max.	3.2km/h	3.2km/h	3.2km/h
- with platform raised	0.8km/h	1.0km/h	1.0km/h
gradeability	14.5°/25%	12°/22%	12°/22%
inside turning radius	0.2m	0.2m	0.2m
ground clearance	89mm	89mm	89mm
lift speed - raise / lower	42/40sec	45/40sec	65/40sec
drive system	dual front wheel hydraulic motors		
tyres	381mm dia. solid rubber, non-marking		
battery charger	25A, 110/220V AC		
parking brake	dual, spring-applied hydraulic release		
control system	one-hand proportional joystick		
power source	24V 4hp DC electric motor	4 x 6V 220 Ah batteries	

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

*X26N: Only available in certain territories - check before ordering.



BP1 - X26/26N/X32 6/07

UpRight
POWERED ACCESS

UpRight Powered Access Sales
Australia & New Zealand
32 Carter St, Homebush Bay, NSW, 2127.
Tel: 02 8737 9500 Fax: 02 8737 9599

E-mail: info@upright-sales.com.au Web: www.upright-sales.com.au


www.upright.com

standard features

- Roll out deck extension
- Proportional controls
- Lift up rear guardrail to ease material loading
- Tilt alarm
- Swing-out service modules
- Crane and forklift points
- Cushion down scissor descent
- Selectable motion alarm
- Non-marking tyres
- Quick retract guardrails
- Horn
- Hour meter / low voltage indicator
- 1 year parts and labour warranty
- 5 year structural warranty

options

- Flashing amber beacon
- Air line to platform
- Special paint colours
- Environmental green oil

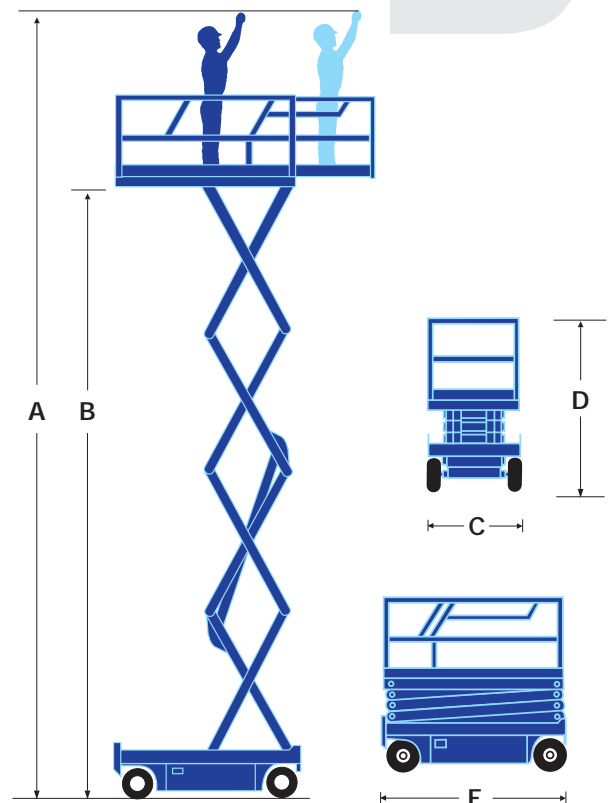

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS